


AGS

Circular silencer

M – galvanized and perforated sheet metal.

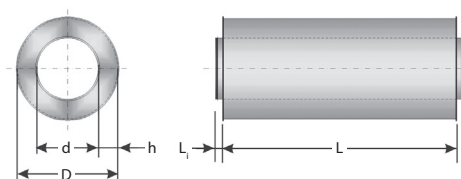

Dimensions, mm			Efficiency S, dB, when frequency F							
d	h	L	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz
100	50	600	4	8	14	26	34	41	45	25
		900	8	11	21	33	48	50	50	28
125	50	600	3	6	12	22	28	37	38	22
		900	5	9	18	30	40	48	43	24
160	50	600	2	5	10	18	23	33	30	19
		900	3	8	16	27	36	47	37	21
200	50	900	2	7	13	24	31	44	31	20
		1200	3	7	14	30	37	46	31	21
	100	600	4	7	12	15	21	31	25	18
		900	7	10	17	21	31	41	30	20
250	50	900	1	6	11	21	27	39	25	19
		1200	2	6	12	27	32	40	26	20
	100	600	3	5	9	12	18	26	20	17
		900	6	8	14	17	27	36	24	20
315	50	900	0	5	9	18	23	32	20	18
		1200	1	5	10	24	28	34	20	19
	100	900	5	7	11	14	25	28	21	18
		1200	7	9	15	18	30	35	23	18
400	50	900	0	4	7	15	19	23	18	17
		1200	0	4	8	21	25	28	19	18
	100	900	3	5	8	11	23	19	17	15
		1200	6	7	11	14	25	23	19	15
500	100	900	3	5	7	10	18	17	16	14
		1200	5	6	10	13	21	20	17	14
630	100	900	2	4	6	10	13	14	14	13
		1200	4	5	9	13	17	17	14	13

Dimensions, mm			h = 50 mm					
			L = 600 mm		L = 900 mm		L = 1200 mm	
d	L ₁	D	Code	Weight, kg	Code	Weight, kg	Code	Weight, kg
100	40	200	354273002	2,30	354273006	3,30		
125	40	225	354273012	2,70	354273016	3,90		
160	40	260	354273022	3,30	354273026	4,70		
200	40	300	354273037	4,00	354273042	5,60	354273046	7,30
250	40	350	354273202	4,90	354273062	6,80	354273066	8,80
315	40	415			354273082	8,40	354273086	11,00
400	65	500			354273102	11,00	354273106	14,00
500	65	600			354273236	13,00	354273242	17,00
630	65	730			354273256	17,00	354273262	21,00
d	L ₁	D	h = 100 mm					
200	40	400	354273052	5,20	354273056	7,20		
250	40	450	354273072	6,10	354273076	8,40		
315	40	515			354273092	10,00	354273096	13,00
400	65	600			354273112	12,00	354273116	16,00
500	65	700			354273122	15,00	354273126	19,00
630	65	830			354273132	19,00	354273136	24,00

ORDER EXAMPLE: circular silencers AGS-250-50-900-M.